

American HVAC Flow Diverter Centrifugal Pump Accessories


Features:

- 90° Elbow/Strainer Combination
- 304SS Strainer
- 20 Mesh Start up Strainer
- Integral Straightening Vanes
- Ductile Iron Body
- Stainless Bolting
- Pump Protection
- Space Savings


Operating Data:

- Class 125/150
- Maximum Pressure 275 PSI
- 240 Degree Max Temperature

Materials of Construction

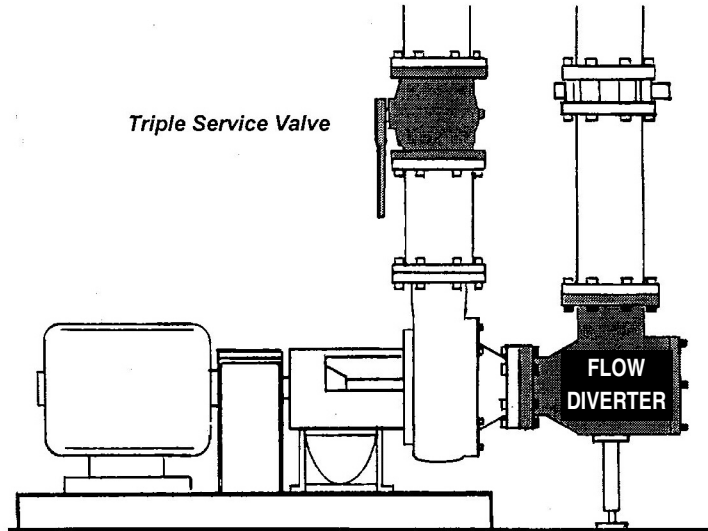

Description	Material	Description	Material
Body	ASTM A536 Ductile Iron/Class 125/150	Start up Screen	20 Mesh 304 Stainless Steel
O'Ring	Nitrile O'Ring	Bolting	ASTM 304 Stainless Steel
Cover	ASTM A536 Ductile Iron	Nuts	ASTM 304 Stainless Steel
Screen	3/16" Perforated 304 Stainless Steel	Pipe Plugs	ASTM A536 Ductile Iron

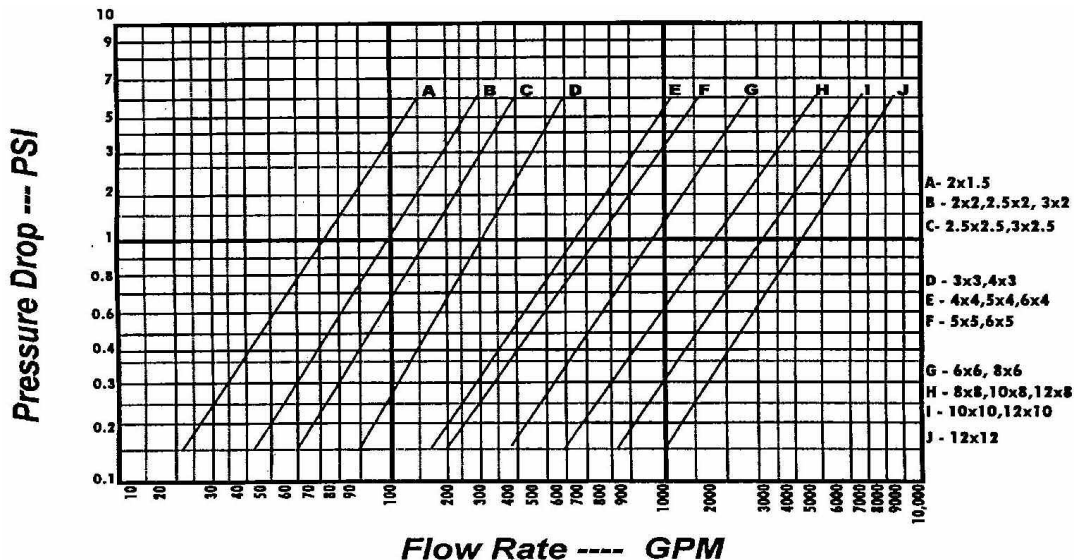

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



1005 E. Houston
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com