


ASME Relief Valve

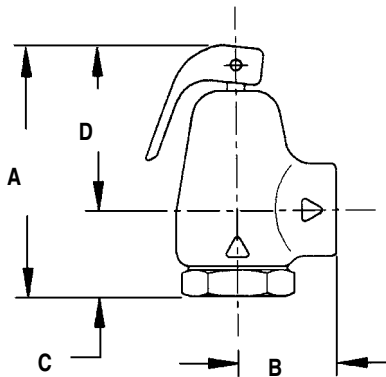

Features:

- Relieves pressure in hot water heating systems
- Eight available pressure settings as listed below. Please specify with order.
- Test lever standard on all models
- ASME listed, rated and stamped
- Bronze body, heat resistant silicone seat disc, stainless steel springs and NPT end connections

ASME Relief Capacities at Standard Settings—BTU/hr. Steam Relief

Setting	3/4"	1"	1 1/4"	1 1/2"	2"
30 PSI	717,400	1,025,000	1,704,000	2,085,000	3,902,000
35 PSI	800,100	1,143,000	1,900,000	2,325,000	4,352,000
45 PSI	965,600	1,380,000	2,293,000	2,806,000	5,252,000
50 PSI	1,048,300	1,498,000	2,490,000	3,047,000	5,701,000
75 PSI	1,461,900	2,090,000	3,472,000	4,249,000	7,951,000
100 PSI	1,875,500	2,680,000	4,454,000	5,451,000	10,200,000
125 PSI	2,289,100	3,271,000	5,437,000	6,653,000	12,450,000
150 PSI	2,702,700	3,862,000	6,419,000	7,855,000	14,700,000

Dimensional Data:

Model	Size	A	B	C	D	Weight (lbs.)
RV0075	3/4"	5"	1 1/2"	1 3/4"	3 1/4"	1.25
RV0100	1"	5 9/16"	1 5/8"	1 7/8"	4 7/16"	2.25
RV0125	1 1/4"	7 3/8"	2 1/16"	1 1/2"	5 7/8"	3.25
RV0150	1 1/2"	7 1/2"	2 15/32"	1 5/8"	5 7/8"	4.37
RV0200	2"	9 7/8"	3"	2 7/8"	7"	9.00

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



1005 E. Houston
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com