



POTABLE BLADDER TANK (ASME Rated) B-SERIES (Bottom Connection)

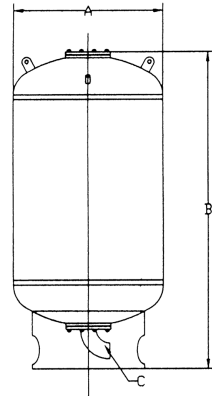

160 GALLON THRU 265 GALLON
FACTORY PRECHARGE: 40 PSI

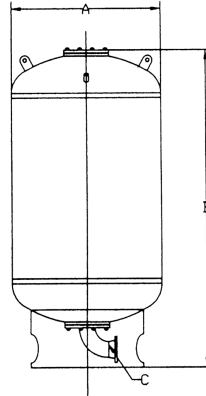

320 GALLON THRU 1320 GALLON
FACTORY PRECHARGE: 40 PSI

PART NUMBER	TANK VOLUME	DIAMETER A(IN.)	LENGTH B(IN.)	INLET/OUTLET C(IN.)	WEIGHT	WORKING PRESSURE
BPT-160B	160 GALLON	25.6	89	2 NPT	390	150 PSI
BPT-210B	210 GALLON	29.5	90	2 NPT	530	150 PSI
BPT-265B	265 GALLON	31.5	95.5	2 NPT	560	150 PSI
BPT-320B	320 GALLON	35.5	101	3 FLANGE	800	150 PSI
BPT-370B	370 GALLON	37.5	103	3 FLANGE	860	150 PSI
BPT-420B	420 GALLON	41.5	100	3 FLANGE	1100	150 PSI
BPT-530B	530 GALLON	43.5	111	4 FLANGE	1200	150 PSI
BPT-790B	790 GALLON	51.2	120	4 FLANGE	1720	150 PSI
BPT-1060B	1060 GALLON	61	123	6 FLANGE	2450	150 PSI
BPT-1320B	1320 GALLON	61	132	6 FLANGE	2800	150 PSI

For Non-Domestic Expansion Tanks, See Series DET and BET. For Domestic Expansion Tanks, See Series NTE and THA.

USE: Designed for storage of domestic potable water for pressure boost.
Bladder material is suitable for domestic water applications.
Installation of tank will help eliminate constant pump use and help prolong pump life.

SPECIFICATION:
Carbon Steel Construction
Maximum Temperature 240° F
Permanent Separation of Air & Water

ASME Section VIII, Division I, Stamped with Documentation
Working Pressure: See Table Above
Primed & Painted Exterior
Fully Replaceable Bladder

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
LOCATION _____

CONTRACTOR _____
CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



1005 E. Houston
Broken Arrow, OK 74012
Toll Free: 866-204-5229
PH: 918-317-0401
FAX: 918-317-0407
www.wheatleyhvac.com
e-mail: sales@globalflowproducts.com