


# ASME Relief Valve

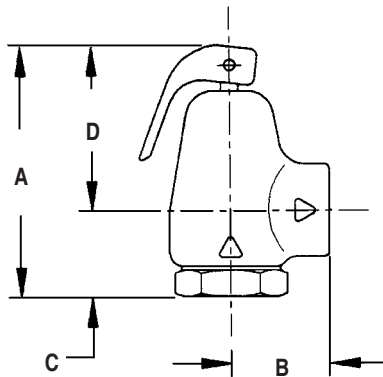

## Features:

- Relieves pressure in hot water heating systems
- Eight available pressure settings as listed below. Please specify with order.
- Test lever standard on all models
- ASME listed, rated and stamped
- Bronze body, heat resistant silicone seat disc, stainless steel springs and NPT end connections

## ASME Relief Capacities at Standard Settings—BTU/hr. Steam Relief

Setting	3/4"	1"	1 1/4"	1 1/2"	2"
30 PSI	717,400	1,025,000	1,704,000	2,085,000	3,902,000
35 PSI	800,100	1,143,000	1,900,000	2,325,000	4,352,000
45 PSI	965,600	1,380,000	2,293,000	2,806,000	5,252,000
50 PSI	1,048,300	1,498,000	2,490,000	3,047,000	5,701,000
75 PSI	1,461,900	2,090,000	3,472,000	4,249,000	7,951,000
100 PSI	1,875,500	2,680,000	4,454,000	5,451,000	10,200,000
125 PSI	2,289,100	3,271,000	5,437,000	6,653,000	12,450,000
150 PSI	2,702,700	3,862,000	6,419,000	7,855,000	14,700,000

## Dimensional Data:

Model	Size	A	B	C	D	Weight (lbs.)
RV0075	3/4"	5"	1 1/2"	1 3/4"	3 1/4"	1.25
RV0100	1"	5 9/16"	1 5/8"	1 1/8"	4 7/16"	2.25
RV0125	1 1/4"	7 3/8"	2 1/16"	1 1/2"	5 7/8"	3.25
RV0150	1 1/2"	7 1/2"	2 15/32"	1 5/8"	5 7/8"	4.37
RV0200	2"	9 7/8"	3"	2 7/8"	7"	9.00

JOB NAME \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 CONTRACTOR P.O. NO. \_\_\_\_\_

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



5454 South 103rd East Avenue  
 Tulsa, OK 74146  
 Toll Free: 866-204-5229  
 PH: 918-592-5058  
 FAX: 918-622-4288  
 www.american-hvac.com  
 e-mail: globalflow@sbcglobal.net