


Y-Type Threaded Strainers-Stainless

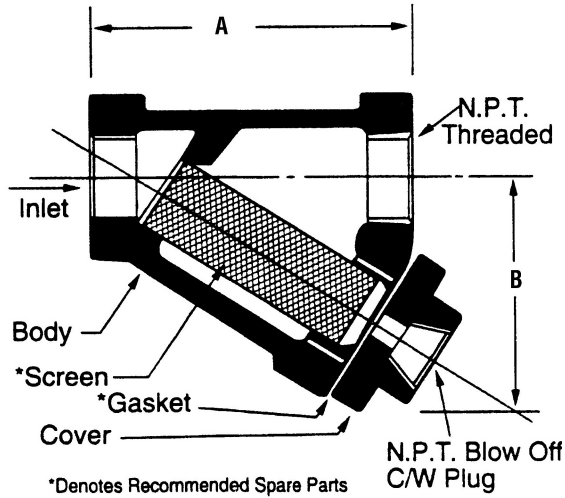

Dimensional Data

Model No.	Size (In.)	A	B	Blowoff NPT	Weight (Lbs.)
CTY0050-SS	1/2	3 1/4	2 1/4	1/4	4
CTY0075-SS	3/4	3 3/4	2 3/4	1/4	5
CTY0100-SS	1	4 1/4	3 3/16	1/2	6
CTY0125-SS	1 1/4	5 1/4	3 7/8	1/2	8
CTY1050-SS	1 1/2	6 1/4	4 3/4	1/2	10
CTY0200-SS	2	7 5/8	6	3/4	18
CTY0250-SS	2 1/2	8 3/8	7	1 1/4	25
CTY0300-SS	3	9 1/2	8 1/2	1 1/4	30

Catalog weights & dimensions are approximate.

Apply for certified dimensions from the factory.

Operating Pressure & Temperature:

Steam	600 PSI @ 486°F
Liquid	1440 PSI @ 100°F

Bill of Materials

Item	Part Name	Material
1	Screen	Stainless Steel
2	Body	ASTM SPEC A351 CF8M

Standard Screens:

Service	Sizes	Screen Openings	Screen Material
Steam & Liquid	1 1/4" thru 3"	20 Mesh .032 perf.	Stainless Steel*

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____